


PRODUCT IS NOT DRAWN TO SCALE

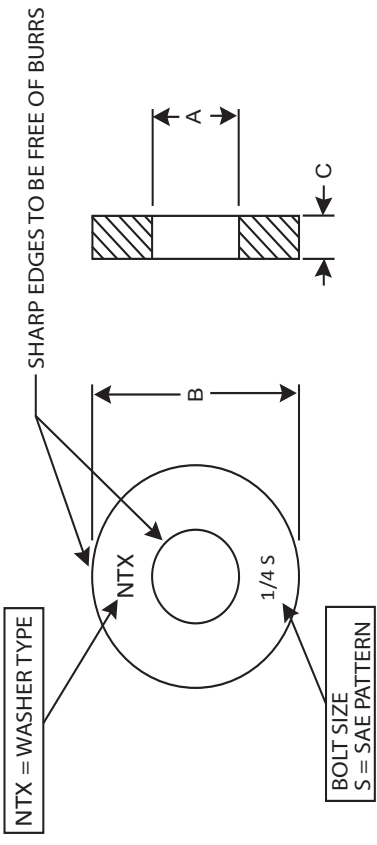

MATERIAL:	1035 STEEL OR BETTER
HARDNESS:	38-45HRC THROUGH HARDENED
MECH. & PHYSICAL PROPERTIES	PER ASTM F-436
HEADMARK:	"NTX" & DIAMETER + "S" (SEE DIAGRAM)
FINISH:	ZINC YELLOW CR+6

Earnest Part Number	Nom Bolt Size	Item Number	A			B			C		
			Inside Dia			Outside Dia			Thickness		
			Basic	+TOL	-TOL	Basic	+TOL	-TOL	Min	Max	
528110	1/4	25SNTX8Y	0.281	0.015	0.005	0.625	0.015	0.005	0.090	0.110	
528111	5/16	31SNTX8Y	0.344	0.015	0.005	0.688	0.015	0.007	0.090	0.110	
528112	3/8	37SNTX8Y	0.406	0.015	0.005	0.812	0.015	0.007	0.110	0.126	
528113	7/16	43SNTX8Y	0.469	0.015	0.005	0.921	0.015	0.007	0.110	0.126	
528114	1/2	50SNTX8Y	0.531	0.015	0.005	1.062	0.030	0.007	0.156	0.188	
528115	9/16	56SNTX8Y	0.594	0.015	0.005	1.156	0.030	0.007	0.156	0.188	
528116	5/8	62SNTX8Y	0.656	0.030	0.007	1.312	0.030	0.007	0.170	0.195	
528117	3/4	75SNTX8Y	0.812	0.030	0.007	1.469	0.030	0.007	0.170	0.195	
528118	7/8	87SNTX8Y	0.938	0.030	0.007	1.750	0.030	0.007	0.235	0.265	
528119	1	100SNTX8Y	1.062	0.030	0.007	2.000	0.030	0.007	0.235	0.265	

DESCRIPTION:
SAE PATTERN "NTX" EXTRA THICK HARDENED
FLAT WASHERS

EARNEST MACHINE CLAIMS ALL PROPRIETARY RIGHTS TO THIS DRAWING AND THE INFORMATION IT CONTAINS. THIS MATERIAL IS CONFIDENTIAL. DISCLOSURE, REPRODUCTION, AND MANUFACTURING IS STRICTLY PROHIBITED WITHOUT THE EXPRESS WRITTEN PERMISSION OF EARNEST MACHINE. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.

THIS DRAWING IS FOR REFERENCE ONLY AND SHOULD NOT BE USED DURING THE MANUFACTURING PROCESS.	UNITS: INCH	PRODUCT SERIES: SNTX8Y	DATE: 2/10/22	REV: B
---	--------------------	-------------------------------	----------------------	---------------